



Greenshine



CLASSICA

Cost Effective Solar Lighting Solutions



General Specifications

Light Fixture (CY25T4-FGC-20LED-3K)

Luminaire input voltage	12 V
Power consumption	30 W
Lumen	2792 lumens
Color temperature	3000 K
IES lighting type	Type III
Material	Die-cast aluminum



Solar Panel

Rating Power	160 W
Maximum Power Voltage	18.72 V
Maximum Power Current	8.01 A
Open Circuit Voltage	22.4 V
Short Circuit Current	8.61 A
Size	58.5" x 27"
Weight	39.5 lbs

Battery

Battery type	GEL Deep cycle lead-acid
Operating voltage	12 V
Capacity	150 Ah at 20 hr-rate to 1.75 V per cell at 77°F
Dimensions	19(L) × 6.7(W) × 9.5(H) (in)
Expected life	5 ~ 7 years

Solar Charger

Operating Voltage	12 V/24 V auto recognition
Max. charge/ load current	5 A/ 10 A/ 20 A (different models)
Night/day detection	2.5 V – 10 V
IP class	IP68

Pole

Height	17 ft.
Diameter	6 3/4" at the bottom, 4" at the top
Thickness	5/32"
Material	Galvanized steel
Finishing	Powder coating

Luminaire

Round shape. Heavy spun aluminum hood with crown, cupola and guard.

One piece injection-molded vessel, UV resistant.

VS3AC: Clear acrylic.

VS3AP: POND acrylic 75% diffusing.

VS3AR: Ribbed acrylic.

or

Cast lens module.

GAL: Clear flat tempered glass lens, 98% transmissive.

SG1GC: Clear sag tempered glass lens.

Tool-free latch opening system.

Seamless silicone gasket.

IP66 rated.

"Cyclo-Tech" coated stainless steel hardware.

Slip fits on a 4" (10cm)Ø x 3" (7cm) long tenon.

Optic

High performance acrylic refractor lenses.

LED

GAL 2-3-3M-4-5*



IESNA type II, III, IV or V

Refractor lens.

*The **GALAXY** light engine consists of an aluminum LED board on a die cast aluminum alloy passive heat sink. Designed and tested for optimal thermal management. High transparency acrylic lenses achieve the suitable IES distribution. A compression gasket with a double coated tempered glass lens mounted on a die cast aluminum alloy lens frame allow for an IP66 rated LED light engine.

Sources

Lamp

4K = High power LED 4000 K (neutral white) ± 150K.

Electric

LED: Auto-adjustable driver, Class 1, min. of 90% power factor. Tool-free removable tray with "quick" connectors.

120, 208, 240, 277 or 347 volts available.

Consult factory for other source and ballast types.

Finish / Options

5 mils/127 microns polyester super durable powder coating.

A wide variety of RAL colors are available in textured (TX) or smooth (SM) finish.

Option

DC_: Decorative cupola.

DIM: Dimmable driver 0-10 volts.

HS: House side shield.

PC: Button type photocell.

PT: Twistlock adjustable photocell.

PTR: Twistlock photocell receptacle.

PTDR: Dimmable PT receptacle (ANSI C136.41).

PX: Shorting cap.

R30: Reducer for 3" (7cm) Ø tenon.

TP: Tamperproof hardware.

HISTORIA



CY25T4-TCY03-DCP

EPA: 2.4 ft²


Weight: 34 lbs - 15 kg



UL US

ORDERING TEMPLATE: Luminaire Globe Optic Watt Lamp Volt Fitter Hood Finial Options Color

LED

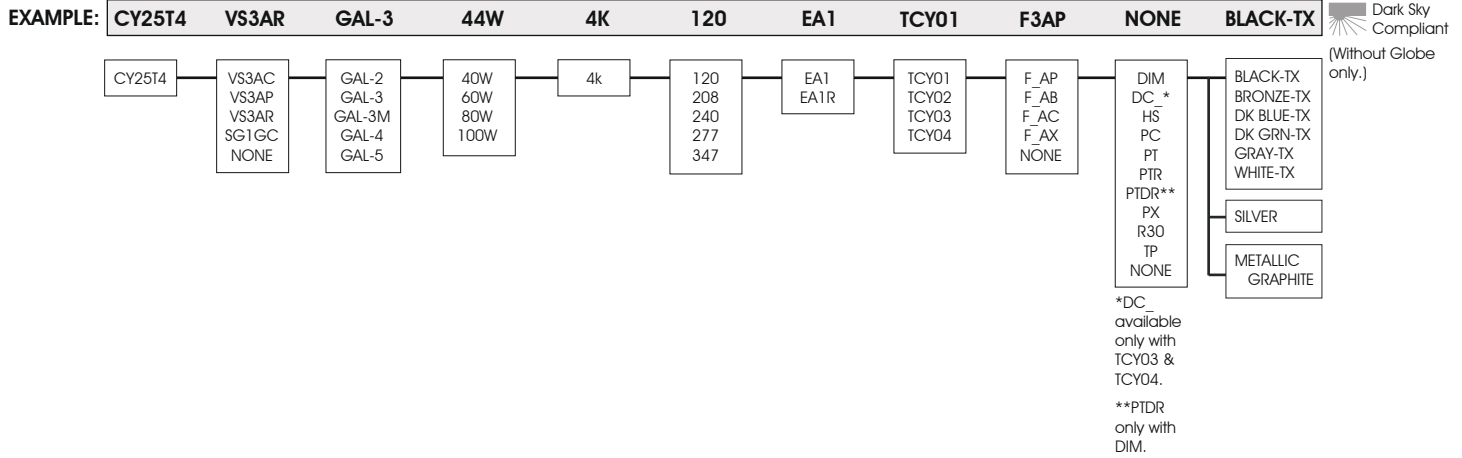

HISTORIA

Fitter




Finials

F_AP: Molded aluminum, luminaire color (standard)
 F_AB: Molded aluminum, brass painted
 F_AC: Molded aluminum, copper painted
 F_AX: Molded aluminum, different color than luminaire



Luminaires / Options

Dark Sky Compliant

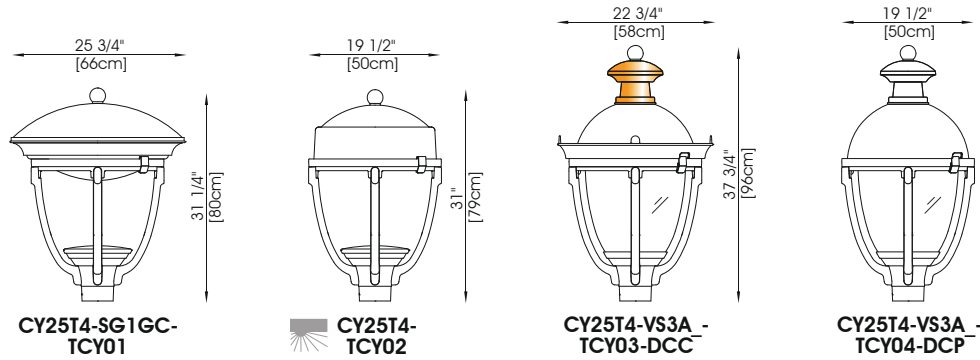


Optional cupola:

- DCB: Brass cupola with clear coat
- DCC: Copper cupola with clear coat
- DCP: Same color as luminaire
- DCX: Different color than luminaire

110W / 160W

- Mono-Crystalline solar cells
- Aluminum frame with a unique design to withstand strong winds
- Highly resistant tempered glass
- Multilayer EVA encapsulation with triple layer back sheet
- 25-year power output warranty: 5 years/95%, 12 years/90%, 25 years/80%.

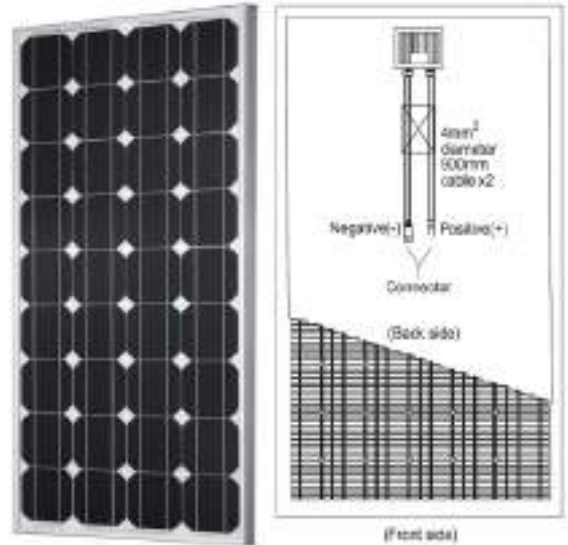

<u>Rating Power</u>	110W	160W
<u>Production Tolerance</u>	± 3%	
<u>Maximum Power Voltage</u>	17.60 V	18.95V
<u>Maximum Power Current</u>	6.25 A	8.45A
<u>Open Circuit Voltage</u>	21.7 V	22.6 V
<u>Short Circuit Current</u>	6.71 A	9.25 A
<u>Frame</u>	Anodized aluminum, 4mm thickness	
<u>Dimensions</u>	1208mm x 682mm 47.5" x 27" 13Kg / 29.5lb	1486mm x 682mm 58.5" x 27" 18Kg / 39.5lb
<u>Test Temperature</u>	25°C / 77°F, 1000w/m ² , Air Mass 1.5	
<u>Junction box / Wiring</u>	IP65 Junction box with 900mm cable with MC4 connectors	



Greenshine Gel-type Battery

(80Ah – 120Ah – 150Ah – 200Ah)

GEL deep cycle battery with a 12 years floating design life is especially designed for frequent cyclic discharge under extreme temperature.



	GS-GEL-H80	GS-GEL-H120	GS-GEL-H150	GS-GEL-H200
Cells per unit	6			
Voltage per unit	12V			
Capacity	80Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F	120Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F	150Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F	200Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F
Weight	26 kg/ 58 lb.	38 kg/ 84 lb.	46 kg/ 100 lb.	59.2 kg/ 131.5 lb.
Dimensions L x W x H	330×172×214(mm) 13''×7''×8.5''	406×173×233 (mm) 16''×7''×9.2''	483×170×240 (mm) 19''×6.7''×9.5''	522×240×218 (mm) 20.5''×9.44''×8.7''
Max discharge current	800A (5 sec)	1200 (5sec)	1500 (5sec)	1500A (5 sec)
Operating temperature range	-40°C~60°C/ -40°F~140°F			
Float charging voltage	13.6 to 13.8 VDC/ unit average at 25°C/ 77°F			
Recommended maximum charging current	16A	24A	30A	40A
Self-discharge	Valve Regulated Lead Acid can be stored for more than 6 months at 25°C/ 77°F. Self-discharge ratio less than 3% per month at 25°C/ 77°F. Please charge batteries before using			
Equalization and cycle service	14.6 to 14.8 VDC/unit Average at 25°C/ 77°F			
Terminal type	5ft copper wire leads from the battery case			

Battery




Greenshine

+1-949-609-9636


sales@streetlights-solar.com

www.streetlights-solar.com


Life characteristics of cyclic use

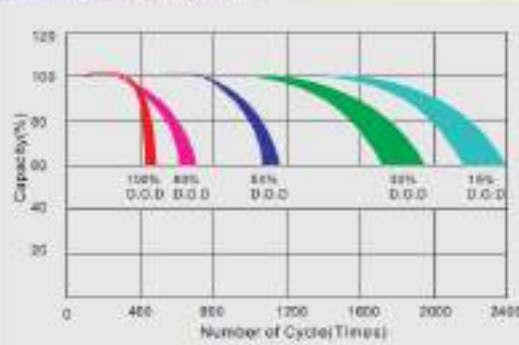


Storage characteristic

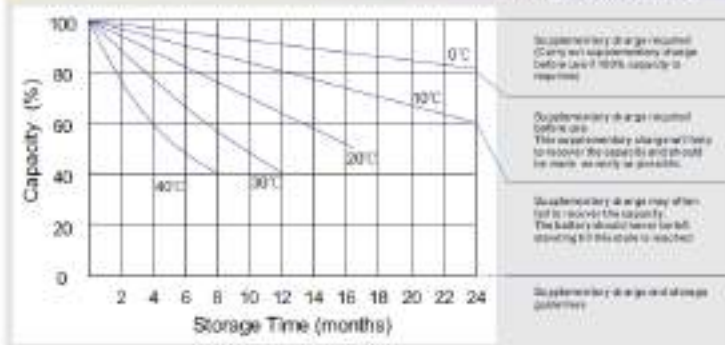

Charge characteristic curve for cyclic use

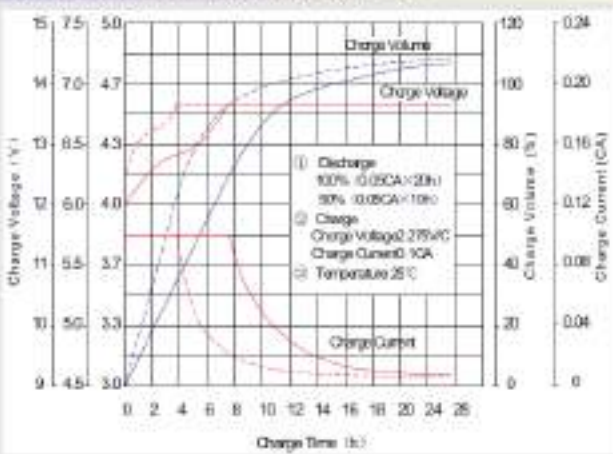

Discharge characteristic curve

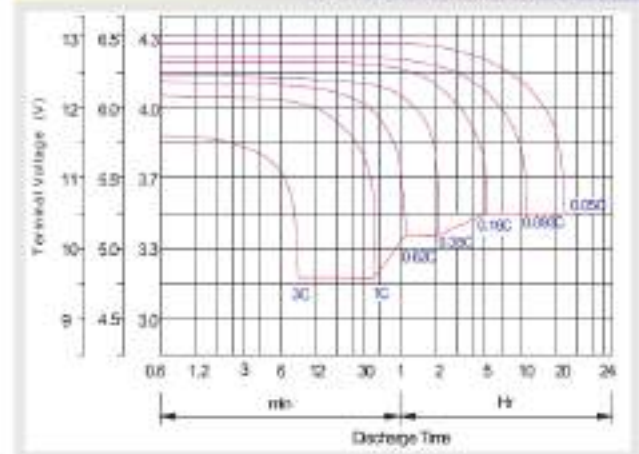

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) < 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/Celbs24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h

Maintenance & Cautions

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.

GS-LED-CTRL






Features

- Corrosion-proof epoxy-encapsulated PCB (IP68)
- Four-stage battery charging (main, float, boost, equalization)
- Temperature compensated
- Automatic system voltage recognition (12V/24V)
- Customized by Greenshine to fit specific needs of clients
- Easy to install

Specification


System voltage	12V/24V auto recognition
Max. charge/ load current	5A/ 10A/ 20A (different models)
Deep discharge protection:	
Cut-off voltage	11V – 12V/ 22V – 24V
Reconnect level	12.8V/25.6V
Oversvoltage protection	15.5V/31.0V
Undersvoltage protection	10.5V/21V
Max. panel voltage	$U_{BATmin} + 30V$ (if module and battery are connected with correct polarity)
Temperature compensation	-25mV/K at 12V
(Charge voltage)	-50mV/K at 24V
Ambient temperature	-40°C to +60°C, -40°F to +140°F
Max. altitude	4,000m above sea level
Battery type	Lead acid (GEL, AGM, flooded)
Adjustment range:	
Evening/morning hours	0 – 15h/ 0 – 14h
Night/day detection	2.5V – 10V
Wire cross section	1.5mm ² / 1.5mm ² / 2.5mm ² , 15 (AWG)
Type of protection	IP68 (1.5 m, 72 h)



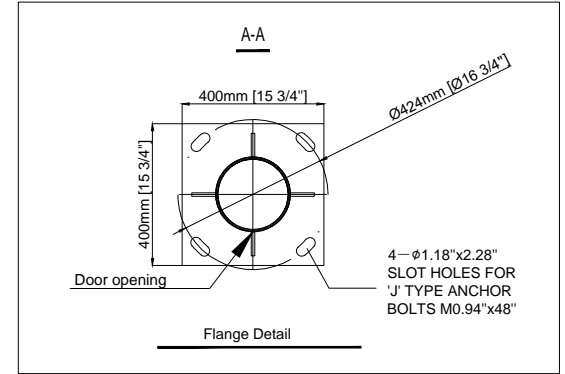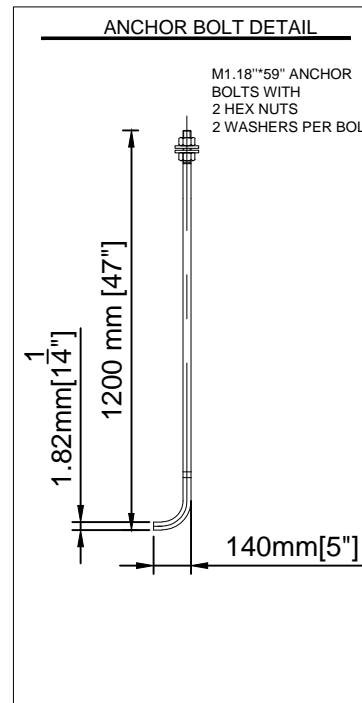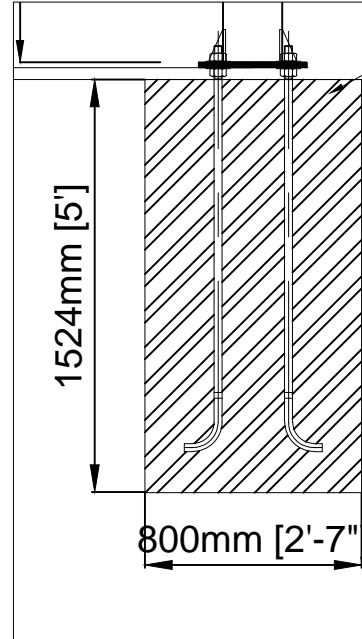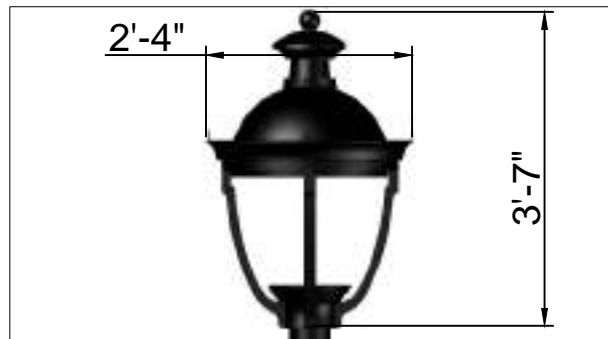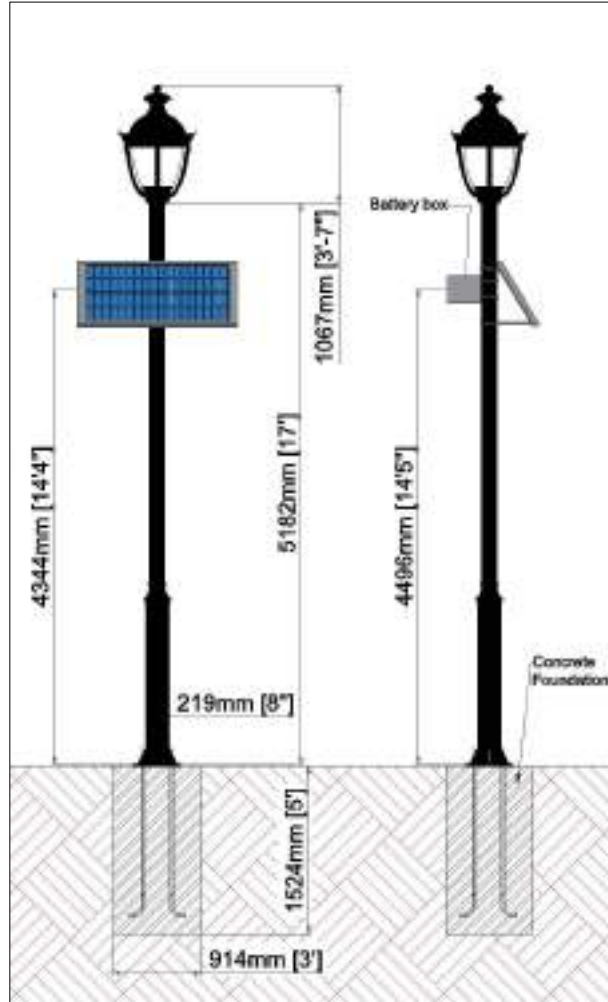

- Foundation dimensions shall be confirmed by a local engineering company, Greenshine New energy will not be held liable for any defect of the concrete foundation due to improper sizing.
- Drawings are based using hot-dipped galvanized steel, powder coating with a thickness of $\frac{1}{32}$ ".
- *EPA of the system exclude the EPA of the pole, includes the solar panels, brackets, arm and LED fixture and battery box.
- **Wind resistance of the poles are indicative and further customization can be provided.

Tilt angle of the solar panels	15	30	45	60
EPA (ft ²)*	6.68	9.31	11.57	13.3
Wind resistance** (mph)	145	145	145	145

Proposal			
System	Classica Series -Decorative pole - 17' pole - 1 panel		
By	Luis Jimenez	Date	6/27/2018
www.streetlights-solar.com			